



IP CAMERA Quick Guide

Version:TWS161001

Step I: Downloaden und installieren Sie APP

Download and install the APP “iMega Cam” before connecting camera.

Two ways:

1.Download “iMega Cam” from App Store or Google Play store, and install the APP.

2.Scan the following QR code to download and install the APP “iMega Cam”.




Step II: Connect camera

Connect the power adapter to camera, then the camera will start self-check and make a beeping sound which indicates that the camera is under smart link mode.

Notice:

1.For outdoor camera, there is no beep sound during wireless installation.

2.For indoor camera, if you haven't heard the beeping sound, please press the “RESET” button around 10 seconds, the camera will restore to factory setting.

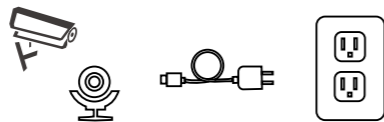


-2-


Step III: Connect camera to Internet

Wireless connection:

Run iMega Cam, tap “+” to add a camera→ Tap “Wireless Installation” and enter Wi-Fi password. → Tap “setting”(or “Set”) and wait until the camera automatically connects to Wi-Fi network. Once connects Wi-Fi successfully, camera will make a successful sound, which means your camera connected to Internet.

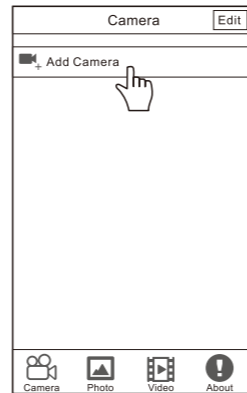


3-1

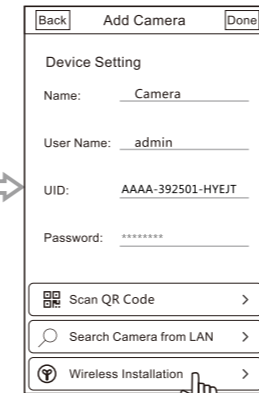


3-2




-3-

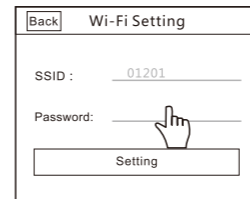

3-3

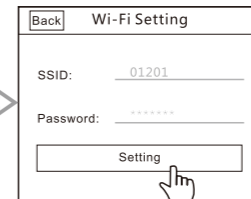

3-4

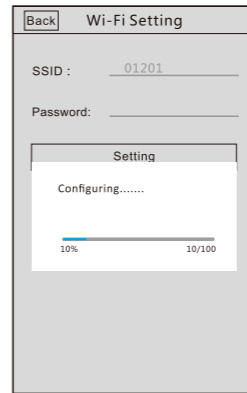

3-5

-4-

Wired connection:


Plug camera power adapter and connect camera to your router with network cable (Only for camera with RJ45 port).

Step IV: Add camera, enjoy your live view


4-1. Tap “Search Camera from LAN” or “Scan QR Code” to add the camera UID.

4-2. Enter camera password (Default password: “admin”), tap “Done”, then camera will be added successfully.

4-3.After adding camera successfully, tap“☑”, you will see camera live view.

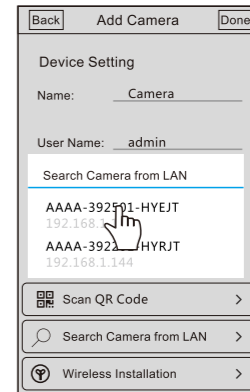


4-1

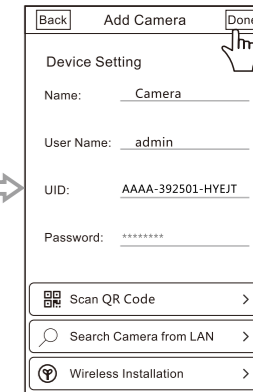

4-2




-5-

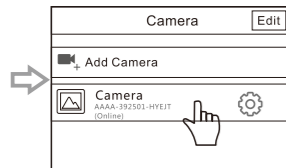

4-3

Basic functions

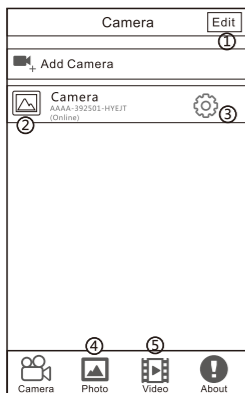

PIC 01

PIC 01


①Edit: Delete device or revise camera name, UID and password, etc.

②Viewing Window: Camera Live View.

③Setting: Set Camera function (like Wi-Fi/Alarm and others).

④Picture: To view snapshots.

⑤Video: To view video in phone or SD card.

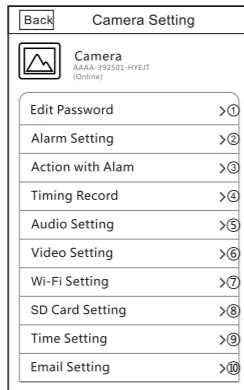


PIC 02(a)

PIC02(a)-PIC02(b)

①Edit Password: change camera password.

②Alarm Setting: Switch On/Off motion detection and adjust alarm sensitivity.

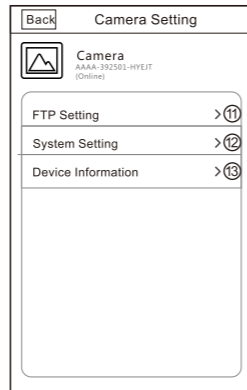

PIC 02 (b)

③Action with Alarm: Switch On/Off different alarm channels. Snapshot pictures to email, micro SD card, FTP server, send video to micro SD card and FTP server.

④Timing Record: Schedule a time to record a video, audio or screen activities.

⑤Audio setting: Adjust camera audio volume.

⑥Video Setting: Set video parameters, default settings are highly recommended.

⑦Wi-Fi Setting: Set camera Wi-Fi connection.

⑧SD Card Setting: Check memory space, available space and format SD Card.


⑨Time Setting: Update date and time on camera.

⑩Email Setting: Set the message sender and receiver.

⑪FTP Setting: Set FTP server address and user.

⑫System Setting: Reboot, reset and firmware update.

⑬Device Information: Check camera information.

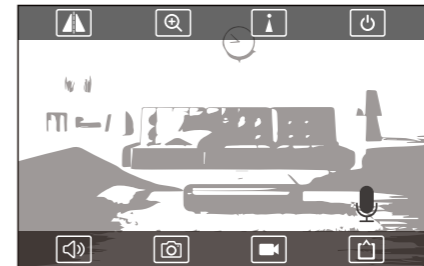

Monitor screen buttons explanation

Tap to get mirror or flip video.

Tap to set preset position(some cameras supported).

Tap to adjust camera's lens focal length(some cameras supported).

Tap to exit live view.

Tap to talk to camera,listen from mobile APP(some cameras supported).

Tap to take snapshots of live view.

Tap to record video of live view.

Tap to select camera video resolution.

Press and hold to speak, camera side can hear the sound(some cameras supported).

Warm tips: Operate camera's pan/tilt direction by sliding camera live video(Only support pan/tilt cameras).

FAQ:

1. Why camera won't connect to Wi-Fi?

Please confirm the power of the camera are well connected, and make sure Wi-Fi password is correct and your phone is not connecting to a 5G Wi-Fi signal. Otherwise you need to press the reset button about 10s, and configure Wi-Fi again.

2. How to change camera password or what if the password is forgotten?

To change camera password, please tap on settings icon to set new password;

If the password is forgotten, please reset camera, then password will be back to default "admin".

3. Can camera be viewed under 3G/4G data network?

Yes, you can view camera via mobile 3G/4G network, but in order to save mobile data, we highly recommend you to use Wi-Fi.

E-mail : support@tenvis.com

Tel : 0086-755-89732479

TENVIS Technology Co., LTD.

http://www.tenvis.com